

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

Heated merchandisers

Full-serve, self-serve or combination

MODEL **HMR-107**
7 well



7-well combination heated merchandiser, model HMR-107. Configuration shown: 2 self/3 full/2 self.

General Information

Henny Penny HMR heated merchandisers are designed to provide the ultimate in flexibility and performance for displaying and serving fresh hot foods. The HMR series is a modular system that lets the operator choose the size, style and configuration of full-serve and self-serve heated modules.

In addition, four different front glass profiles are available to help you match existing cases.

All full-serve modules feature Henny Penny's unique THERMA-VEC® Even Heat Process that holds food at precise temperatures and keeps glass from fogging for a more appetizing display. Upper and lower heating is independently controlled.

The HMR merchandisers can be ordered as:

- All full-serve
- All self-serve
- Custom combination of full and self serve sections in modules of two or more adjacent wells that add up to seven. (See separate Data Sheets for other sizes.)

Merchandiser bases are available in Profile or Pedestal styles in several heights and colors. (See separate Data Sheet.)

Standard Features

- Stainless steel interior and exterior construction, tempered front and side panel glass and doors.
- Choose from four glass profiles:
 - Henny Penny curved
 - Henny Penny straight
 - Vision (matches Hussmann Vision® series)
 - Advantage (matches Tyler Advantage® series.)
- Exclusive THERMA-VEC® Even Heat Process holds food at precise temperatures with no fogging.
- Independent controls over each well for upper radiant heat and food probe temperature display.
- Lower heat and water pan heat independently controlled.
- Control settings can be locked to prevent accidental changes.
- Humidified operation with built-in low-water indication.
- Separate switches for power and lights.
- Brilliant halogen lamps for attractive food presentation.
- Front glass in two sections lifts easily for cleaning and closes gently on gas springs.
- Mirrored or clear side glass. (CE units are only available with clear side glass.)
- Removable sliding rear doors with mirrored glass.
- Fold-down wood or plastic cutting board.
- Units are shipped with adjustable pan supports, food temperature probes, and a water pan.

Accessories available separately

- Modular system of wire shelves and guide rails that offer "two-tier" capacity for various HMR configurations:
 - Wire shelf—three-well section
 - Wire shelf—two-well section
 - Pan support with guide rail

<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED	<input type="checkbox"/> RESUBMIT
AUTHORIZED SIGNATURE		DATE



Henny Penny Corporation
PO Box 60 Eaton OH 45320 USA
+1 937 456.8400 800 417.8417
+1 937 456.8434 Fax 800 417.8434 Fax
www.hennypenny.com


PROJECT

ITEM NO

Heated merchandisers

Full-serve, self-serve or combination

MODEL **HMR-107**
7 well

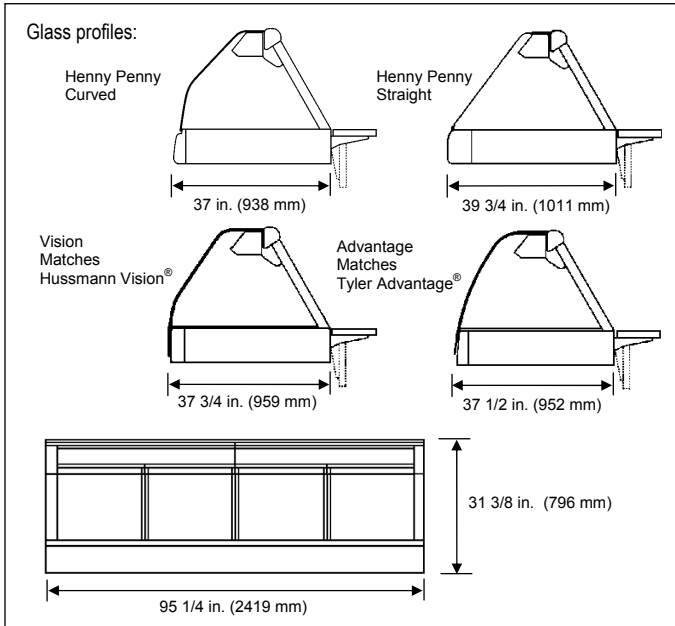

Dimensions

Length: 95 1/4 in. (2419 mm)
 Depth: 37 in. (938 mm) HP Curved
 39 3/4 in. (1011 mm) HP Straight
 37 3/4 in. (959 mm) Hussmann Vision
 37 1/2 in. (952 mm) Tyler Advantage
 Height: 31 3/8 in. (796 mm)

Required clearances

Top: 15 in. (381 mm) for raised front glass.
 Back: 9 in. (229 mm) for cutting board

Crated dimensions

Length: 100 3/8 in. (2550 mm)
 Depth: 48 3/4 in. (1238 mm)
 Height: 40 in. (1016 mm)
 Volume: 113 cu. ft. (3.17 m³)

Crated weight

697 lbs. (316 kg) may vary with selections.

Capacity

Full-serve Per well
 (1) full-size pan
 (1) third-size pan up to 4 in. (102 mm) depth.

Self-serve Insert

2-well area 26 3/4 x 24 3/4 in. (679 x 628 mm)
 3-well area 26 3/4 x 37 3/4 in. (679 x 959 mm)
 4-well area 26 3/4 x 49 1/2 in. (679 x 1257 mm)
 5-well area 26 3/4 x 62 1/2 in. (679 x 1588 mm)
 7-well area 26 3/4 x 87 1/4 in. (679 x 2216 mm)
 Specify depth Flat, 3/8 in. (10 mm), or 2 in. (51 mm)

Electrical

All units are 50/60 Hz.

Power cord and plug included for Canada or USA destination:
 120/208V 1Ph
 120/240V 1Ph
 NEMA-14-50P



120/208V 3Ph
 NEMA L14-30P



All other electrical configurations must be hardwired at installation.

Certifications



Configuration	Volts	Phase	Low Watts/Amps		High Watts/Amps		Wire
<input type="checkbox"/> 7S 	120/208	1	5089	24.5	6839	32.9	3+G
	120/240	1	5089	21.2	7157	29.8	3+G
	220-240	1	5783	24.1	7850	32.7	2+G
	120/208	3	5089	18.4	6839	22.1	4+G
	120/240	3	5089	16.3	7157	20.2	4+G
	380-415	3	5783	10.8	7850	12.2	3NG
<input type="checkbox"/> 7F 	120/208	1	6153	29.6	7903	38.0	3+G
	120/240	1	6225	25.9	8292	34.5	3+G
	220-240	1	6918	28.8	8985	37.4	2+G
	120/208	3	6153	19.3	7903	23.2	4+G
	120/240	3	6225	17.1	8292	21.1	4+G
	380-415	3	6918	10.8	8985	13.3	3NG
<input type="checkbox"/> 5S/2F* 	120/208	1	5577	26.8	7327	35.2	3+G
	120/240	1	5613	23.4	7680	32.0	3+G
	220-240	1	6306	26.3	8373	34.9	2+G
	120/208	3	5577	18.7	7327	22.5	4+G
	120/240	3	5613	16.5	7680	20.5	4+G
	380-415	3	6306	10.8	8373	12.6	3NG
<input type="checkbox"/> 5F/2S* 	120/208	1	5665	27.2	7415	35.7	3+G
	120-240	1	5701	23.8	7768	32.4	3+G
	220-240	1	6394	26.6	8461	35.3	2+G
	120/208	3	5665	19.0	7415	22.9	4+G
	120/240	3	5701	16.8	7768	20.8	4+G
	380-415	3	6394	10.8	8461	12.9	3NG
<input type="checkbox"/> 4S/3F* 	120/208	1	5665	27.2	7415	35.7	3+G
	120/240	1	5701	23.8	7768	32.4	3+G
	220-240	1	6394	26.6	8461	35.3	2+G
	120/208	3	5665	19.0	7415	22.9	4+G
	120/240	3	5701	16.8	7768	20.8	4+G
	380-415	3	6394	10.8	8461	12.9	3NG
<input type="checkbox"/> 4F/3S* 	120/208	1	5665	27.2	7415	35.7	3+G
	120/240	1	5701	23.8	7768	32.4	3+G
	220-240	1	6394	26.6	8461	35.3	2+G
	120/208	3	5665	19.0	7415	22.9	4+G
	120/240	3	5701	16.8	7768	20.8	4+G
	380-415	3	6394	10.8	8461	12.9	3NG
<input type="checkbox"/> 3S/2F/2S* 	120/208	1	5577	26.8	7327	35.2	3+G
	120/240	1	5613	23.4	7680	32.0	3+G
	220-240	1	6306	26.3	8373	34.9	2+G
	120/208	3	5577	18.7	7327	22.5	4+G
	120/240	3	5613	16.4	7680	20.5	4+G
	380-415	3	6306	10.8	8373	12.6	3NG
<input type="checkbox"/> 3F/2S/2F* 	120/208	1	6153	29.6	7903	38.0	3+G
	120/240	1	6225	25.9	8292	34.5	3+G
	220-240	1	6918	28.8	8985	37.4	2+G
	120/208	3	6153	19.3	7903	23.2	4+G
	120/240	3	6225	17.1	8292	21.1	4+G
	380-415	3	6918	10.8	8985	13.3	3NG
<input type="checkbox"/> 2S/3F/2S 	120/208	1	5665	27.2	7415	35.7	3+G
	120/240	1	5701	23.8	7768	32.4	3+G
	220-240	1	6394	26.6	8461	35.3	2+G
	120/208	3	5665	19.0	7415	22.9	4+G
	120/240	3	5701	16.8	7768	20.8	4+G
	380-415	3	6394	10.8	8461	12.9	3NG
<input type="checkbox"/> 2F/3S/2F 	120/208	1	6065	29.2	7815	37.6	3+G
	120/240	1	6137	25.6	8204	34.2	3+G
	220-240	1	6830	28.5	8897	37.1	2+G
	120/208	3	6065	19.0	7815	22.9	4+G
	120/240	3	6137	16.8	8204	20.8	4+G
	380-415	3	6830	10.8	8897	13.3	3NG

*Well modules can be arranged in opposite order.

Bidding Specifications See separate page

Continuing product improvement may subject specifications to change without notice.

HENNY PENNY
Global Foodservice Solutions

www.hennypenny.com